



Lámparas


Catálogo 2021

Lámparas Led Exterior



+507 6128-0684
dmaryexpress.com
logistica@dmaryexpress.com
/dmaryexpress
@dmaryexpress
Calle de los Guayacanes, PH Sun City, Apto 7C,
Albrook, Corregimiento Ancon,
Ciudad Panamá

CATALOG



P1



P2



P3



P4



P5



P6



P7



P8



P9



P10



P11

LED FLOOD LIGHT



AF 13 SERIES



Model	Power	Voltage	Lumen	Beam Angle	CCT	Size	QTY/CTN
AF13	10W	AC100-240V	800LM	120°	2700-6500K	103*83*24MM	50PCS
AF13	20W	AC100-240V	1600LM	120°	2700-6500K	124*100*24MM	50PCS
AF13	30W	AC100-240V	2400LM	120°	2700-6500K	159*122*26MM	30PCS
AF13	50W	AC100-240V	4000LM	120°	2700-6500K	206*160*34MM	20PCS
AF13	100W	AC100-240V	8000LM	120°	2700-6500K	380*280*43.5MM	10PCS
AF13	150W	AC100-240V	12000LM	120°	2700-6500K	380*280*44MM	5PCS
AF13	200W	AC100-240V	16000LM	120°	2700-6500K	445*335*46MM	5PCS
AF13	250W	AC100-240V	20000LM	120°	2700-6500K	445*335*46MM	5PCS
AF13	300W	AC100-240V	24000LM	120°	2700-6500K	445*335*46MM	5PCS



AF 13 SENSOR SERIES



Model	Power	Voltage	Lumen	Beam Angle	CCT	Size	QTY/CTN
AF13-Con Sensor	10W	AC100-240V	800LM	120°	2700-6500K	103*158*49MM	50PCS
AF13-Con Sensor	20W	AC100-240V	1600LM	120°	2700-6500K	159*197*51MM	50PCS
AF13-Con Sensor	30W	AC100-240V	2400LM	120°	2700-6500K	159*197*51MM	30PCS
AF13-Con Sensor	50W	AC100-240V	4000LM	120°	2700-6500K	206*210*35MM	20PCS
AF13-Con Sensor	100W	AC100-240V	8000LM	120°	2700-6500K	270*260*35MM	10PCS

LED FLOOD LIGHT



AF 38A SERIES

IP 65	PF >0.5/0.9	CRI ≥70	h 30000
-----------------	-----------------------	-------------------	-------------------

Model	Power	Voltage	Lumen	Beam Angle	CCT	Size
AF 38A	10W	AC100-240V	1000LM	120°	2700-6500K	111.5*88*11MM
AF 38A	20W	AC100-240V	2000LM	120°	2700-6500K	145.5*111*12MM
AF 38A	30W	AC100-240V	3000LM	120°	2700-6500K	175*134*14MM
AF 38A	50W	AC100-240V	5000LM	120°	2700-6500K	211*160*15.5MM
AF 38A	100W	AC100-240V	10000LM	120°	2700-6500K	310*235*21MM

LED FLOOD LIGHT



AF 38A SERIES

IP 65	PF >0.5/0.9	CRI ≥70	h 30000
-----------------	-----------------------	-------------------	-------------------

Model	Power	Voltage	Lumen	Beam Angle	CCT	Material	Size
AF 46	30W	AC100-240V	2700LM	120°	3000-6500K	Aluminum+Glass	152*49*244MM
AF 46	50W	AC100-240V	4500LM	120°	3000-6500K	Aluminum+Glass	213*49*321MM
AF 46	100W	AC100-240V	9000LM	120°	3000-6500K	Aluminum+Glass	258*50*346MM
AF 46	200W	AC100-240V	18000LM	120°	3000-6500K	Aluminum+Glass	265*50*401MM
AF 46	300W	AC100-240V	27000LM	120°	3000-6500K	Aluminum+Glass	316*55*461MM
AF 46	400W	AC100-240V	36000LM	120°	3000-6500K	Aluminum+Glass	369*55*521MM

LED STREET LIGHT



- Luminaire available from 30-150W
- High strength aluminum die casting Aluminum, surface anti-aging electrostatic spray processing, super corrosion resistance
- Humanized design concept, easy to install and maintain
- IP66.2 year warranty or 3 year warranty or 5 year warranty
- Lumileds led high luminous efficiency and long life
- Light gray, dark gray, black color for choice



Front of product



Back of product



ASL 66 SERIES

IP

66

PF

>0.95

CRI

≥70

h

25000/50000

Model	Power	Lumen	Voltage	SPD	CCT	Size
ASL66	30W	3000LM	AC100-240V	6000V	2700-6500K	310*126*40MM
ASL66	50W	5000LM	AC100-240V	6000V	2700-6500K	400*140*45MM
ASL66	60W	6000LM	AC100-240V	6000V	2700-6500K	400*140*45MM
ASL66	80W	8000LM	AC100-240V	6000V	2700-6500K	525*185*45MM
ASL66	100W	10000LM	AC100-240V	6000V	2700-6500K	525*185*45MM
ASL66	120W	12000LM	AC100-240V	6000V	2700-6500K	630*186*60MM
ASL66	150W	15000LM	AC100-240V	6000V	2700-6500K	630*186*60MM

HIGHBAY LIGHT

SOSEN LED DRIVER



Main features:

- Insulated Conductor, Aluminum Base, Epistar 3030 Chip
- Professional air convection design for best heat dissipation
- Ultra low power consumption
- IP65.3 years warranty or 5 years warranty

PF

>0.95



≥70





30000

UF 06 SERIES

Model	Power	Voltage	Lumen	CCT	Size
UF 06	50W	AC100-240V	5000LM	2700-6500K	φ230*155MM
UF 06	100W	AC100-240V	10000LM	2700-6500K	φ310*167MM
UF 06	150W	AC100-240V	15000LM	2700-6500K	φ360*180MM
UF 06	200W	AC100-240V	20000LM	2700-6500K	φ410*185MM

SOSEN LED DRIVER

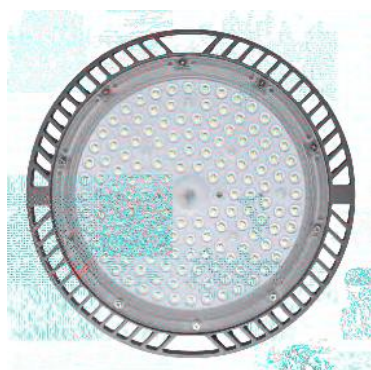

Main features:

- Insulated Conductor, Aluminum Base, Epistar 3030 Chip
- Professional air convection design for best heat dissipation
- Ultra low power consumption
- IP65.3 years warranty or 5 years warranty

PF

>0.95



≥70



30000

UF 08 SERIES

Model	Power	Voltage	Lumen	Beam Angle	CCT	Size
UF 08	100W	AC100-240V	10000LM	120°	2700-6500K	φ240*200MM
UF 08	150W	AC100-240V	15000LM	120°	2700-6500K	φ300*210MM
UF 08	200W	AC100-240V	20000LM	120°	2700-6500K	φ350*210MM

LED SOLAR FLOOD LIGHT



AF 009 SERIES

Model	Power	Solar Panel	Battery	CCT	LED Chip	Illumination Time
AF 009	45W	6V/15W 350*350*17MM	3.2V/12A	2700-6500K	COB	13-24H
AF 009	45W	6V/12W 350*280*17MM	3.2V/10A	2700-6500K	COB	13-24H
AF 009	45W	6V/10W 235*185*17MM	3.2V/6A	2700-6500K	COB	13-24H
AF 009	65W	6V/20W 450*350*17MM	3.2V/20A	2700-6500K	COB	13-24H
AF 009	65W	6V/18W 420*350*17MM	3.2V/15A	2700-6500K	COB	13-24H
AF 009	65W	6V/12W 350*280*17MM	3.2V/10A	2700-6500K	COB	13-24H
AF 009	100W	6V/35W 700*350*17MM	3.2V/39A	2700-6500K	COB	13-24H
AF 009	100W	6V/25W 530*350*17MM	3.2V/30A	2700-6500K	COB	13-24H
AF 009	100W	6V/22W 480*350*17MM	3.2V/20A	2700-6500K	COB	13-24H
AF 009	200W	6V/35W 700*350*17MM	3.2V/40A	2700-6500K	COB	13-24H
AF 009	200W	6V/30W 635*350*17MM	3.2V/35A	2700-6500K	COB	13-24H
AF 009	200W	6V/25W 530*280*17MM	3.2V/25A	2700-6500K	COB	13-24H

LED SOLAR FLOOD LIGHT



AF 010 SERIES

Model	Power	Solar Panel	Battery	LED Chip	Material	Illumination Time
AF 010	50W	6V/10W Polycrystalline Silicon	3.2V/6A	3030 96PCS 160Lm/W	Aluminum+PC	12H
AF 010	100W	6V/15W Polycrystalline Silicon	3.2V/15A	3030 144PCS 160Lm/W	Aluminum+PC	12H
AF 010	200W	6V/20W Polycrystalline Silicon	3.2V/3.2A	3030 216PCS 160Lm/W	Aluminum+PC	12H

SOLAR LED STREET LIGHT



ASL 008 SERIES

Model	Power	Solar Panel	Battery	LED Chip	Material	Illumination Time
ASL 008	100W	5V 12W Polycrystalline Silicon	3.2V 12AH	SMD 5730 300PCS	Aluminum/ABS	12H
ASL 008	200W	5V 18W Polycrystalline Silicon	3.2V 18AH	SMD 5730 624PCS	Aluminum/ABS	12H
ASL 008	200W	5V 24W Polycrystalline Silicon	3.2V 24AH	SMD 5730 900PCS	Aluminum/ABS	12H



MPPT CONTROL



BATTERY MANAGE SYSTEM



SPECIAL LED




INFRARED SENSOR



WIRELESS CONTROL SYSTEM

SOLAR LED STREET LIGHT

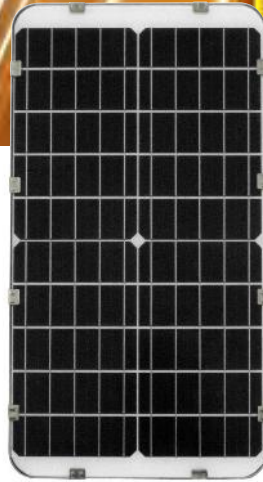

ASL 015 SERIES

Model	Power	Solar Panel	Battery	LED Chip	Material	Size	Illumination Time
ASL 015	60W	6V 20W Polycrystalline Silicon	3.7V 6AH	3030 Epistar 60PCS	Aluminum	552*282*130MM	12H
ASL 015	80W	6V 20W Polycrystalline Silicon	3.7V 12AH	3030 Epistar 100PCS	Aluminum	552*282*130MM	12H
ASL 015	100W	6V 20W Monocrystalline Silicon	3.7V 18AH	3030 Epistar 100PCS	Aluminum	552*282*130MM	12H
ASL 015	100W	6V 30W Polycrystalline Silicon	3.7V 9AH	3030 Epistar 180PCS	Aluminum	657*325*130MM	12H
ASL 015	150W	6V 30W Polycrystalline Silicon	3.7V 12AH	3030 Epistar 180PCS	Aluminum	657*325*130MM	12H
ASL 015	180W	6V 30W Monocrystalline Silicon	3.7V 15AH	3030 Epistar 180PCS	Aluminum	657*325*130MM	12H



MPPT CONTROL



BATTERY MANAGE SYSTEM



SPECIAL LED



INFRARED SENSOR



WIRELESS CONTROL SYSTEM

SOLAR LED STREET LIGHT



ASL 023 SERIES

Model	Power	Solar Panel	Battery	LED Chip	Material	Size	Illumination Time
ASL 023	20W	6V 35W Monocrystalline Silicon	3.2V 46AH	Philips SMD 3030 64PCS	Aluminum	571*413*160MM	2-3Days
ASL 023	40W	6V 45W Monocrystalline Silicon	3.2V 60AH	Philips SMD 3030 128PCS	Aluminum	700*413*160MM	2-3Days
ASL 023	60W	6V 60W Monocrystalline Silicon	3.2V 40AH	Philips SMD 3030 192PCS	Aluminum	957*413*160MM	2-3Days
ASL 023	80W	6V 85W Monocrystalline Silicon	3.2V 46AH	Philips SMD 3030 256PCS	Aluminum	1215*413*160MM	2-3Days



MPPT CONTROL



BATTERY
MANAGE SYSTEM



SPECIAL LED



INFRARED SENSOR



WIRELESS CONTROL
SYSTEM

SOLAR LED GARDEN LAMP



ASL 55D

Model:	ASL 55D
Solar Panel:	6V 18W(90W/120W)/6V 20W(200W)
Battery:	3.2V 18AH(90W/120W)/3.2V 24AH(200W)
Power:	90W/120W/200W
LED:	5730 SANAN CHIPS
Lumen Efficiency:	160LM/W
Material:	Plastic
Color Temperature:	2700-6500K
Working Temperature:	-25°C~+65°C
Charge Time:	5-6 Hours (Strong Sunshine)
Working Time:	12 Hours
Mounting Height:	3-4M
Distance Between Light:	10-20M
Control Way:	PIR + Dimmer
Product size:	420*420*125MM(90W/120W)/550*550*125MM(200W)
Package Dimension:	5PCS/CTN,440*440*670MM(90W/120W) 5PCS/CTN,570*570*670MM(200W)
Package Weight:	3KG(90W/120W)/4KG(200W)



MPPT CONTROL



BATTERY
MANAGE SYSTEM



SPECIAL LED



INFRARED SENSOR



WIRELESS CONTROL
SYSTEM